

STAINLESS STEEL Y-TYPE STRAINER

SS304 800PSI F7S800-50
SS316 800PSI F7S800-51



FEATURES & SPECIFICATIONS

- Y-Pattern body
- Threaded cap
- Stainless steel mesh
- Threaded to BS 21 (ISO 7) / ANSI B2.1 / DIN 259 / DIN 2999
- Applicable for Building Services, Air-Conditioning, Fire Protection, Cold Water Plumbing, Hot Water System, General Industries.




PRESSURE & TEMPERATURE RATINGS

Working Pressure	800psi WOG Non-Shock
Testing Pressure	x1.5 times
Working Temperature	-25°C ... 180°C
Suitable Media	Water, Oil & Gas

MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	Stainless Steel 304	EN 10088-3 1.4301
	Stainless Steel 316	EN 10088-3 1.4401
Bonnet	Stainless Steel 304	EN 10088-3 1.4301
	Stainless Steel 316	EN 10088-3 1.4401
Screen	Stainless Steel 316	EN 10088-3 1.4401
Gasket	PTFE	

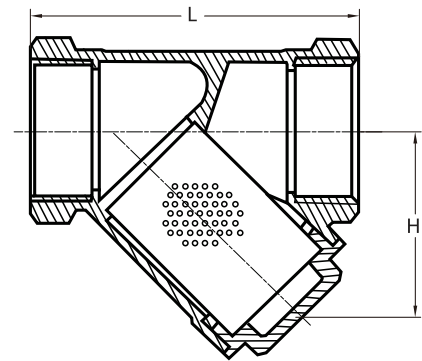

SCREENS DATA

DN(mm)	Hole Dia. (mm)	Hole / inch ²
8 ... 100	2	1

DIMENSIONS

DN (mm) (inch)	8	10	15	20	25	32	40	50	65	80	100
L	64	64	64	80	90	106	119	140	167	198	238
H	43	43	43	50	65	69	79	95	117	137	163

Fivalco® is Registered Trade Mark
FIVALCO LIMITED
info@fivalco.com | www.fivalco.com

Exclusive Distributor :
ENVALCO SDN. BHD. (1039097-M)
No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia
T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W: www.envalco.com.my

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.