

FIRERISER GATE VALVE NRS TYPE FLANGED ENDS


250PSI

Fig No.: 3288-L-200-FLA / 3288-L-250-FLA



FEATURES & SPECIFICATIONS

- Non-rising stem
- Stainless steel stem
- Valve conforms to AWWA C515
- Fusion bonded epoxy coated interior and exterior RAL3002
- Flange drilled to ANSI B16.1 Class 125 / ANSI B16.5 Class 150 / EN1092-2 PN16 / BS10 Table D / Table E
- Working pressure : 250psi for DN350 / DN400 / DN450, 200psi for DN500 / DN600
- Working temperature : -10°C ... 120°C
- All valves provided with 2" (50mm) operating nut

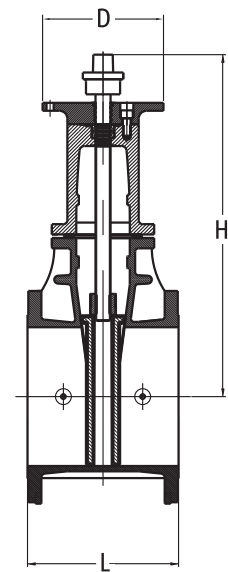

MATERIALS LIST

Name	Material
Body	Ductile Iron ASTM A536 65-45-12
Wedge Disc	Ductile Iron ASTM A536 65-45-12 + EPDM
Disc Nut	ASTM B62 C83600
Stem	Stainless Steel AISI 431
Gasket	EPDM
Bonnet	Ductile Iron ASTM A536 65-45-12
Thrust Collar	Bronze ASTM B62
Gland	Ductile Iron ASTM A536 65-45-12
Wrench Nut	Ductile Iron ASTM A536 65-45-12
Post Plate	Ductile Iron ASTM A536 65-45-12

DIMENSIONS (inch/mm)

Size	14"/350	16"/400	18"/450	20"/500	24"/600
L	15.00/381	15.98/406	17.01/432	17.99/457	20.00/508
H	33.94/862	36.93/938	41.61/1057	44.96/1142	50.98/1295
D	12.01/305	12.01/305	12.01/305	12.01/305	12.01/305

NET WEIGHT (kg) & CRATE QTY (pcs)

Size	14"/350	16"/400	18"/450	20"/500	24"/600
N.W.	232.00	308.00	446.00	636.00	848.00
Crate Qty	1	1	1	1	1

Fivalco® is Registered Trade Mark
FIVALCO LIMITED
 info@fivalco.com | www.fivalco.com

Exclusive Distributor :
ENVALCO SDN. BHD. (1039097-M)
 No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia
 T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W : www.envalco.com.my