

FIREFLY BRONZE OS&Y GATE VALVE THREADED ENDS

175PSI

Fig No.: BGV







FEATURES & SPECIFICATIONS

- Threaded ends : NPT or BSPT
- Working pressure : 175psi



MATERIALS LIST

No.	Name	Material
1	Body	Bronze ASTM C83600
2	Bonnet	Bronze ASTM C83600
3	Stem	Brass
4	Handwheel	Cast Iron
5	Packing Gland	Bronze ASTM C83600
6	Disc	Bronze ASTM C83600
7	Disc Pin	SS304
8	Gland Packing	Graphite
9	Stud	Steel
10	Yoke Bushing	Brass
11	Set Screw	Steel

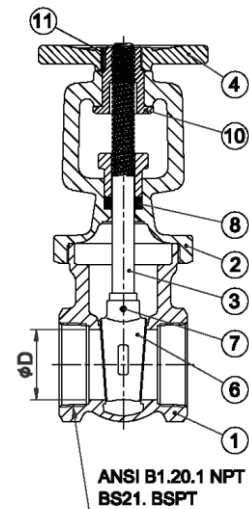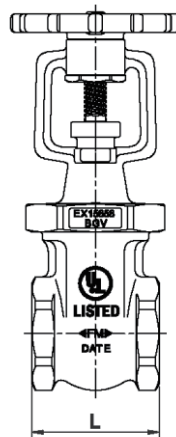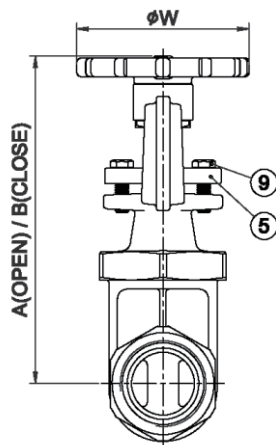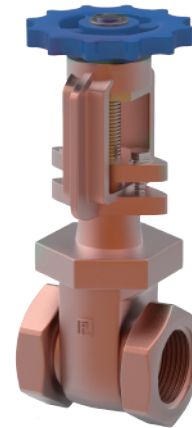

DIMENSIONS (mm)

Size	A \pm 3	B \pm 3	L \pm 0.5	D	W \pm 3
0.75"/20	173	145.5	59	20	80
1"/25	196.5	163	69	25	80
1.25"/32	220.5	181.5	75	32	80
1.5"/40	243	197	82	37.5	100
2"/50	282	227	90.5	50	120

NET WEIGHT (kg) & CRATE QTY (pcs)

Size	N.W.	Crate Qty
0.75"/20	1.40	18
1"/25	1.80	16
1.25"/32	2.48	12
1.5"/40	3.24	8
2"/50	4.73	6

Fivalco® is Registered Trade Mark
FIVALCO LIMITED
 info@fivalco.com | www.fivalco.com

Exclusive Distributor:
ENVALCO SDN. BHD. (1039097-M)
 No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia
 T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W: www.envalco.com.my

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.