

# BRASS NRS GATE VALVE

PN16 F2B16



## FEATURES & SPECIFICATIONS

- Threaded bonnet
- Solid wedge disc
- Non-rising stem
- Integral seat
- Threaded to BS EN 10226-1 (ISO 7)
- Applicable for Building Services, Air-Conditioning, Fire-Protection, Cold Water Plumbing, Hot Water System, General Industries




## PRESSURE & TEMPERATURE RATINGS

Working Pressure	16bar WOG Non-Shock 8.6bar Saturated Steam
Shell Testing Pressure (x1.5)	24bar Hydrostatic
Seat Testing Pressure (x1.1)	17.6bar Hydrostatic 5.5bar Air
Working Temperature	-10°C ... 170°C
Suitable Media	Water, Oil & Gas

## MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	Brass	EN 12165 CW617N
Bonnet	Brass	EN 12165 CW617N
Disc	Brass	EN 12165 CW617N
Stem	Brass	EN 12165 CW617N
Packing	PTFE	
Packing Nut	Brass Rod	EN 12165 CW617N
Gland	Brass Rod	EN 12165 CW617N
Handwheel	Cast Iron	EN-JL 1040
Gasket	PTFE	

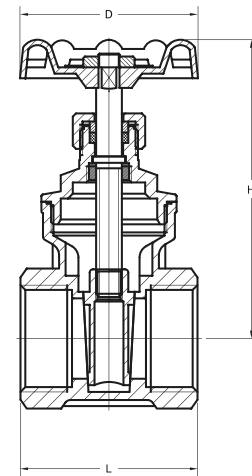

## DIMENSIONS

DN (mm)	15	20	25	32	40	50	65	80	100
DN (inch)	½	¾	1	1¼	1½	2	2½	3	4
L	45	49	55	62	64	72	88	98	107
H	75	83	94	111	124	144	186	209	255
D	53	53	58	72	72	78	96	110	130

Fivalco® is Registered Trade Mark  
**FIVALCO LIMITED**  
 info@fivalco.com | www.fivalco.com

Exclusive Distributor:  
**ENVALCO SDN. BHD.** (1039097-M)  
 No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
 T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W: www.envalco.com.my

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.