

BRONZE RISING STEM GATE VALVE

PN32 F2G32R



FEATURES & SPECIFICATIONS

- Threaded bonnet
- Solid wedge disc
- Rising stem
- Integral seat
- Threaded to BS EN 10226-1 (ISO 7)
- Applicable for Building Services, Air-Conditioning, Fire-Protection, Cold Water Plumbing, Hot Water System, General Industries


PRESSURE & TEMPERATURE RATINGS

Working Pressure	32bar WOG Non-Shock 10bar Saturated Steam
Shell Testing Pressure (x1.5)	48bar Hydrostatic
Seat Testing Pressure (x1.1)	35bar Hydrostatic 5.5bar Air
Working Temperature	-10°C ... 170°C
Suitable Media	Water, Oil & Gas



MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	Bronze	BS EN 1982 CC491K
Bonnet	Bronze	BS EN 1982 CC491K
Disc	Bronze	BS EN 1982 CC491K
Stem	DZR Brass	BS EN 12165 CW602N
Stem Bush	DZR Brass	BS EN 12165 CW602N
Packing Nut	Brass Rod	BS EN 12165 CW614N
Packing	PTFE	
Handwheel	Aluminium	

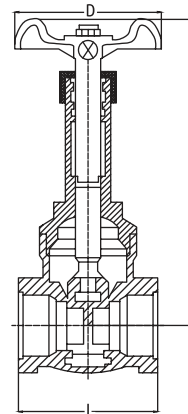

DIMENSIONS

DN (mm) DN (inch)	15 ½	20 ¾	25 1	32 1¼	40 1½	50 2	(mm)
L	43	49	54	62	65	75	
H	112	125	143	170	198	233	
D	50	56	63	70	80	92	

Fivalco® is Registered Trade Mark
FIVALCO LIMITED
 info@fivalco.com | www.fivalco.com

Exclusive Distributor:
ENVALCO SDN. BHD. (1039097-M)
 No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia
 T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W: www.envalco.com.my

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.