

# DZR BRASS Y-TYPE STRAINER

PN16 F7Z16



## FEATURES & SPECIFICATIONS

- Y-Pattern body
- Threaded cap
- Stainless steel mesh
- Dezincification (DZR) copper alloy body and cap
- Threaded to EN 10226-1 (ISO 7)
- Applicable for Building Services, Air-Conditioning, Fire Protection, Cold Water Plumbing, Hot Water System, General Industries.




## PRESSURE & TEMPERATURE RATINGS

Working Pressure	16bar WOG Non-Shock 8.6bar Saturated Steam
Testing Pressure (x1.5)	24bar Hydrostatic
Working Temperature	-10°C ... 170°C
Suitable Media	Water, Oil & Gas

## MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	DZR Brass	EN 12165 CW602N
Cap	DZR Brass	EN 12165 CW602N
Screen	Stainless Steel 304	EN 1449 304S31
Gasket	Non-Asbestos	

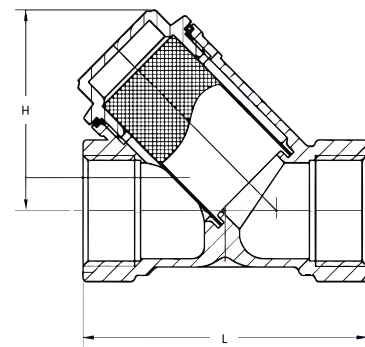

## DIMENSIONS

DN (mm) DN (inch)	15 ½	20 ¾	25 1	32 1¼	40 1½	50 2	65 2½	80 3	100 4
L	56	69	82	90	101	123	176	201	250
H	41	48	58	66	74	92	136	146	189

Fivalco® is Registered Trade Mark  
**FIVALCO LIMITED**  
info@fivalco.com | www.fivalco.com

Exclusive Distributor :  
**ENVALCO SDN. BHD.** (1039097-M)  
No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W: www.envalco.com.my

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.