

FLEXIBLE HOSE

PN16 F85MH16
PN25 F85MH25




SPECIFICATIONS

- Threaded to BS EN 10226-1 (ISO 7)
- Stainless Steel 304 internal tube and external braiding

APPLICATIONS

- Designed to compensate for piping misalignment and movement
- To accommodate vibration, reduce noise, relief stress and prevent system shock
- Suitable for applications such as pumps, compressors and other mechanical equipment
- Applicable to Building Services, Air-Conditioning, Fire-Protection, Cold Water Plumbing & Sanitary, Hot Water System, General Industries.

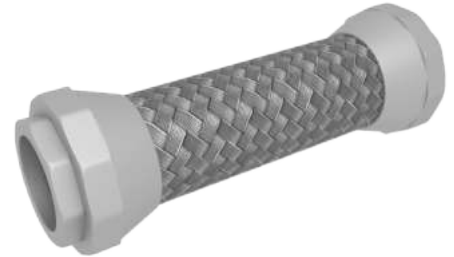


PRESSURE & TEMPERATURE RATINGS

Working Pressure	16bar	25bar
Test Pressure (x1.5)	24bar	37.5bar
Working Temperature	Maximum 220°C	
Suitable Media	Water, Air, Steam, Oil, Gas	

MATERIAL SPECIFICATIONS

Part	Material
Union Screw	Carbon Steel Stainless Steel 304
Union Nut	Carbon Steel Stainless Steel 304
Gasket	Fiber
Flexible Tube	Stainless Steel 304
Braiding	Stainless Steel 304

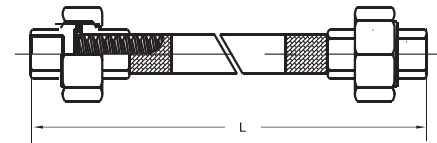

DIMENSIONS AND MOVEMENTS

DN	(mm)	15	20	25	32	40	50	(mm)
	(inch)	½	¾	1	1¼	1½	2	
	L	300	300	300	300	300	300	
	Lateral Movement	25	25	25	20	15	20	

Note : Other length available on request.

Fivalco® is Registered Trade Mark
FIVALCO LIMITED
info@fivalco.com | www.fivalco.com

Exclusive Distributor :
ENVALCO SDN. BHD. (1039097-M)
No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia
T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W: www.envalco.com.my

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.