

BRASS AIR VENT

PN10 F9B10



FEATURES & SPECIFICATIONS


- Threaded bonnet
- Threaded to EN 10226-1 (ISO 7)
- Size Range : 15mm (½"), 20mm (¾"), 25mm (1")

PRESSURE & TEMPERATURE RATINGS

Working Pressure	10bar Water Non-Shock
Testing Pressure (x1.5)	15bar Hydrostatic
Working Temperature	-10°C ... 70°C
Suitable Media	Water

MATERIAL SPECIFICATIONS

Part	Material	Specification
Body	Brass	EN 12165 CW614N
Disc	Brass	EN 12165 CW614N
Stem	Brass	EN 12165 CW614N
Cap	Brass	EN 12165 CW614N
Gasket	NBR	
Air Cap	Brass	EN 12165 CW614N
Connector	Brass	EN 12165 CW614N
Core	Brass	EN 12165 CW614N

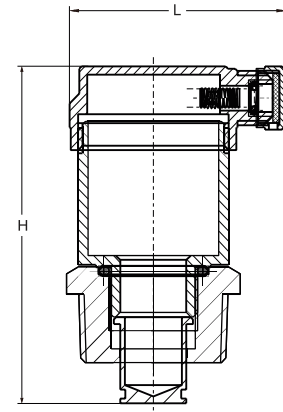

DIMENSIONS

DN (mm)	15	20	25
DN (inch)	½	¾	1
L	50	50	50
H	68	68	68

Fivalco® is Registered Trade Mark
FIVALCO LIMITED
info@fivalco.com | www.fivalco.com

Exclusive Distributor :
ENVALCO SDN. BHD. (1039097-M)
No. 30, Jalan PJU 3/46, Sunway Damansara Technology Park, 47810 Petaling Jaya, Selangor Darul Ehsan, Malaysia
T: 603 - 7883 0018 | F: 603 - 7883 0012 | E: enquiry@envalco.com.my | W: www.envalco.com.my

Fivalco reserves the right to alter the information in this document without prior notice. Fivalco shall not be liable for technical errors or omissions contained herein.